


DS-2CE56C2P(N)-IT3

720 TVL PICADIS Outdoor IR Turret Camera




EXIR

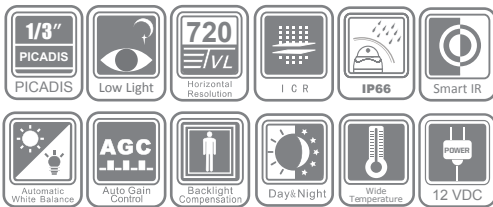

Key features

- 1/3" PICADIS
- EXIR Technology
- True Day/Night
- 720 TVL Horizontal Resolution
- 40m IR Distance
- Smart IR
- IP66 Weatherproof
- Wide Operating Temperature Range

Dimensions

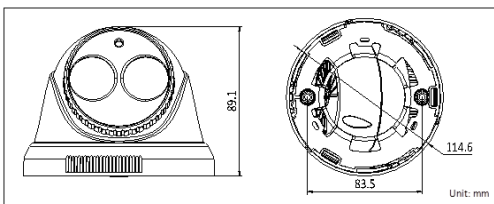

Accessories



DS-1258ZJ
(Wall Mount)

DS-2CE56C2P(N)-IT3	
Camera	
Image Sensor	1/3" PICADIS
Signal System	PAL/NTSC
Effective Pixels	1280(H)×960(V)
Min. Illumination	0.1Lux @ (F1.2,AGC ON),0 Lux with IR 0.3Lux @ (F2.3,AGC ON),0 Lux with IR
Shutter speed	PAL: 1/25 s to 1/10,000 s NTSC: 1/30 s to 1/10,000 s
Lens	12mm @ F2.3(3.6mm, 6mm, 8mm, 16mm optional), Angle of view: 22.62° (12mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360°
Day & Night	IR cut filter with auto switch
Horizontal Resolution	720 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
BLC	On
General	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Max. 6 W (Max. 8W with IR cut filter on)
Ingress Protection	IP66
IR Range	40 meters
Dimensions	Φ 114.6× 89.1mm(Φ 4.5"×3.5")
Weight	300 g (0.66 lbs)

Available models

PAL: DS-2CE56C2P-IT3
NTSC: DS-2CE56C2N-IT3